



Futurecom Systems Group, ULC

## Mobile Radio and Control Head Installation Guide for Rackmount DVRS

Document: 8F090X01  
Revision: R3  
Date: 2023-02-06

---

## Document Revisions

Rev	Date	By	Notes & References
0	October 2019	SN/AJK	Preliminary Release
1	March 2020	D. Shefer	Updated assembly instructions and pictures Added External Alarm programming instructions Changed Rack Mount to Rackmount Included link to latest programming guide
2	August 2020	D. Shefer	Updated DVR-LX Specification Sheet Update for O2 Control Head installation
3	February 2023	K. Sol	Updated logo

## NOTES

## Contents

Document Revisions .....	2
NOTES.....	2
<b>Contents .....</b>	<b>3</b>
<b>Foreword.....</b>	<b>6</b>
Terminology Used .....	6
Computer Software Copyrights.....	7
Document Copyrights .....	7
Disclaimer .....	7
<b>Commercial Warranty .....</b>	<b>8</b>
<b>RF Energy Exposure Compliance, Awareness and Control Information and Operational Instructions .....</b>	<b>9</b>
<b>Introduction .....</b>	<b>10</b>
Rackmount DVRS Installation .....	11
Installation Tools Required .....	11
Installation Guidelines .....	11
External Alarm Option Programming Instructions .....	17
Rackmount DVRS Antenna Requirements .....	20
Appendix 1 – DVR-LX P25 Rackmount Repeater Specifications .....	21

---

## List of Figures

Figure 1 - Rackmount DVRS Form Factor .....	10
Figure 2 - Rackmount DVRS - As Received (front view).....	11
Figure 3 - Rackmount DVRS - As Received (rear view) .....	12
Figure 4 - MSU parts to be installed in the tray.....	12
Figure 5 - Control head connections.....	12
Figure 6 - Control head installation.....	13
Figure 7 - Location of the microphone clip mounting screws .....	13
Figure 8 - Installation of the microphone clip .....	13
Figure 9 - DC and RF cable connections.....	14
Figure 10 - Installation of the MSU – step 1.....	14
Figure 11 - Installation of the MSU – step 2.....	15
Figure 12 - DC Power connections.....	15
Figure 13 - MSU (System) and DVR (Local) Antenna connector location .....	15
Figure 14 - Front panel fully assembled.....	16
Figure 15 - Optional external alarm hardware location .....	17
Figure 16 - Hardware Setup window .....	17
Figure 17 - Relay Use options .....	18
Figure 18 - Alarm threshold values.....	19

---

## Related Publications

Publication Number	Description
8M083X25R18	DVRS Vehicle Mount Installation & Programming Guide
8A093X01R1	DVR/VRX1000 User Guide)

## Foreword

This manual provides installation guidelines for mounting Motorola's Remote Mount APX Mobile Radio and O2 Control Head, inside Futurecom's Rackmount DVRS.

## Terminology Used

Abbreviation	Description
<b>Control Head</b>	Motorola Mobile Radio Control Head – O2
<b>DVRS</b>	Digital Vehicular Repeater System
<b>MSU</b>	Motorola Mobile Subscriber Unit
<b>Rackmount DVRS</b>	Complete DVRS and Mobile Radio System, packaged in a 19" rackmount tray

## Computer Software Copyrights

The products described in this manual include copyrighted Futurecom computer programs stored in semiconductor memories or other media. Laws in the United States, Canada and other countries preserve for Futurecom certain exclusive rights for copyrighted computer programs, including but not limited to, the exclusive right to copy or reproduce in any form the copyrighted computer programs. Any copyrighted computer program contained in the Futurecom products described in this manual may not be copied, reproduced, modified, reverse-engineered, or distributed in any manner without the express written permission of Futurecom. The purchase of Futurecom products shall not be deemed to grant either directly or by implication, estoppels, or otherwise, any license under the copyrights, patents or patent applications of Futurecom, except for the normal non-exclusive license to use that arises by operation of law in the sale of a product.

## Document Copyrights

No part of this manual may be reproduced, distributed or transmitted in any form or by any means, for any purpose without written permission of Futurecom.

## Disclaimer

The information in this document is carefully examined and is believed to be entirely reliable. However, no responsibility is assumed for inaccuracies. Futurecom Systems Group, ULC. reserves the right to make changes to any products herein to improve readability, function or design. Futurecom does not assume any liability arising out of the application or use of any product or circuit described herein.

## Proprietary Statement

© 2022 Futurecom Systems Group, ULC  
All Rights Reserved

Futurecom<sup>®</sup>, PDR8000<sup>®</sup>, the Futurecom Logo and the Stylized FC logo are registered trademarks of Futurecom Systems Group, ULC. All other trademarks are the property of their respective owner.

No part of this document, or any software included with it, may be reproduced and distributed without the prior written permission of the copyright holder.

Futurecom Systems Group, ULC reserves the right to make changes or improvements to the equipment, software or specification described in this document at any time and without prior notice. These changes will be incorporated in the new releases of this document.

This document may contain technical inaccuracies or typographical errors.

Futurecom Systems Group, ULC waives responsibility for any labour, materials or costs incurred by any party because of using this document.

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.

## Commercial Warranty

**Futurecom Systems Group, ULC.** warrants to the original purchaser all standard products sold by Futurecom Systems Group, ULC. to be free of defects in material and workmanship for eighteen (18) months from the date of shipment from Futurecom Systems Group, ULC.

Futurecom's warranty hereunder DOES NOT cover the following :

- (i) Defects or damage resulting from use of the product in other than its normal and customary manner.
- (ii) Defects or damage from improper installation, testing, operation, or maintenance.
- (iii) Defects or damage due to alterations, modifications or adjustments carried out by the Buyer without Futurecom's explicit approval.
- (iv) Defects or damage from misuse, accident, water or neglect.
- (v) Freight costs to the repair depot.
- (vi) Scratches or other cosmetic damage to the product surfaces that does not affect the operation of the product.
- (vii) Normal wear and tear.

The warranty set forth herein is conditioned upon proper storage, installation, use and maintenance in accordance with applicable written recommendation of Futurecom. The warranty furnished hereunder does not extend to damage to items purchased hereunder resulting in whole or in part from the use of components, accessories, parts or supplies not furnished by Futurecom Systems Group, ULC.

Futurecom's sole obligation shall be to repair or replace, at Futurecom's option, any defective component or item and pay transportation expenses for such replacement at no charge to Buyer who shall provide labor for the removal of the defective component or item and installation of its replacement at no charge to Futurecom. Buyer shall bear all risk of loss or damage to returned goods while in transit. In the event no defect or breach of warranty is discovered by Futurecom upon receipt of any returned item, the item will be returned to Buyer at Buyer's expense and Buyer will reimburse Futurecom for the transportation charges, labor and associated charges incurred in testing the allegedly defective item.

Except as expressly provided herein, Futurecom makes no warranty of any kind, expressed or implied, with respect to any goods, parts and service provided by Futurecom including, but not limited to, the implied warranties or merchantability and fitness for a particular purpose. The sole and exclusive remedy for breach of any warranty is limited to the remedies provided in the paragraph above. Futurecom shall not in any event be liable for any other damages arising out of or in connection with furnishing of goods, parts or service hereunder, or the performance, use of, or inability to use any goods, parts or service, or otherwise, whether based on contract, tort or any other legal theory.

To exercise this warranty, please contact Futurecom's Administration Department in Concord, Ontario, Canada at 1-800 701 9180 to obtain a return material authorization (RMA) and shipping instructions. No product will be accepted for return without an RMA. The repair of a product by Futurecom pursuant to this warranty is warranted for the balance of the original warranty period, or at least 90 days from date of shipment to Buyer of the repaired product.



---

## RF Energy Exposure Compliance, Awareness and Control Information and Operational Instructions

This radio equipment is intended for use in occupational / controlled conditions, where users have full knowledge of their exposure and can exercise control over their exposure to meet FCC limits. This radio device is NOT authorized for general population, consumer or any other use.

### **ATTENTION!**

Changes or modifications not expressly approved by Futurecom Systems Group, ULC. could void the User's authority to operate the equipment.

### **Temporary-Fixed Site**

Futurecom requires the P25 19" Rackmount DVRS operator to ensure FCC/IC Requirements for Radio Frequency Exposure are met. It is the responsibility of the Licensee to ensure that the appropriate separation distances between the antennas and bystanders are established and followed to meet the FCC and IC Maximum Permissible Exposure (MPE) Requirements in any particular Temporary-Fixed location. In situations where a site assessment is not practical, it is recommended that the antennas be located at least 9 feet from bystanders. This should ensure MPE compliance in any Temporary-Fixed application and is likely to be a much greater separation distance than is necessary in most cases. Failure to observe the MPE distance exclusion area around the antenna may expose persons within this area to RF energy above the FCC/IC exposure limits for bystanders (general population).

### **Vehicular Use**

If the 19" Rackmount DVRS is set up in an vehicle, Users should refer to the separation distances specified in the "RF Safety" Book 8F083X03 to determine the separation distances to be used and the antennas approved for such vehicular use. Failure to observe the MPE distance exclusion area around the antenna may expose persons within this area to RF energy above the FCC/IC exposure limits for bystanders (general population). It is the responsibility of the repeater operator to ensure MPE limits are observed at all times during transmissions.

### **ATTENTION!**

Refer to Product Safety and RF Energy Exposure Booklet 8F083X03 for basic fixed site installation guidance, and for use in a vehicular application.

## Introduction

The Digital Vehicular Repeater System (DVRS) is typically mounted inside the trunk of a car and powered from the car's battery. Some applications other than vehicular use require added flexibility, which can be achieved with the use of a Rackmount DVRS which is designed to fit into a standard 19" rack.

**Note:** - Product Safety and RF Energy Exposure Booklet 8F083X03 includes approved antennas and associated output powers for DVRS.

The Rackmount DVRS is a Mobile Radio, Control Head, DVR-LX and Filters packaged in a compact 19" rack tray as shown on Figure 1 below.

The Rackmount DVRS can be powered up by connecting it directly to +13.8 V DC Power Supply.



10 1/2" x 19" x 15 3/4"

**Figure 1 - Rackmount DVRS Form Factor**

---

## Rackmount DVRS Installation


### Installation Tools Required

Description	Needed for:
#2 Philips	Tightening of screws.
3/16" Flat Screwdriver	Tightening of connector screws.

### Installation Guidelines

#### **STEP 1**

Unpack the Rackmount DVRS and note the location of the mounting screws for the MSU Control Head and Microphone clip as shown on Figure 2 and Figure 3. The MSU components mounted in the tray are shown in Figure 4.

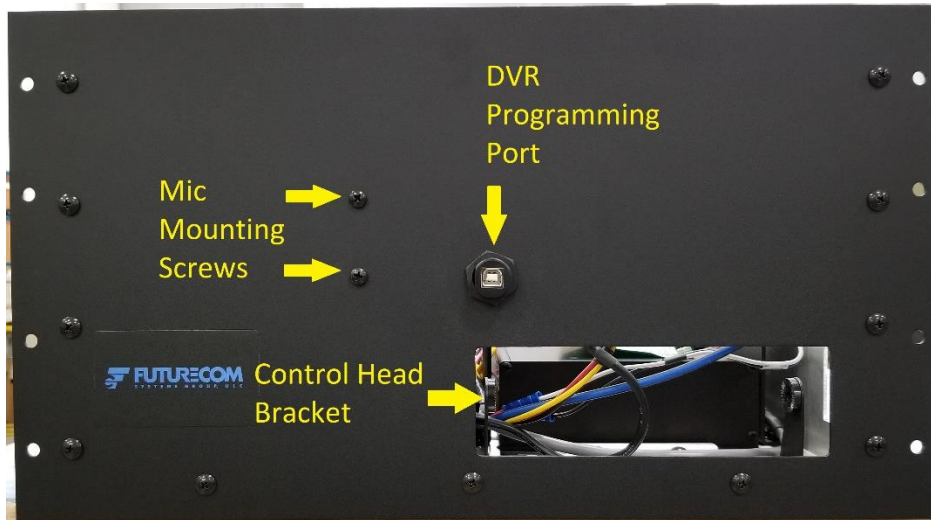

**Figure 2 - Rackmount DVRS - As Received (front view)**

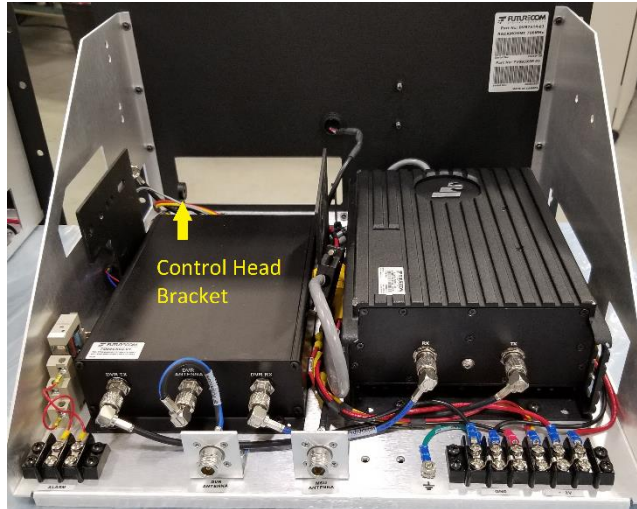


Figure 3 - Rackmount DVRS - As Received (rear view)



Figure 4 - MSU parts to be installed in the tray  
(The Microphone is installed on the front panel)

**STEP 2:**

Connect the DC and the control cable to the Control Head as shown in Figure 5. Install the Control Head in the Control Head Bracket as shown in Figure 6.



Figure 5 - Control head connections



Figure 6 - Control head installation

**STEP 3**

Locate and remove the Microphone clip mounting screws (Figure 7). Attach the microphone clip as shown in Figure 8.

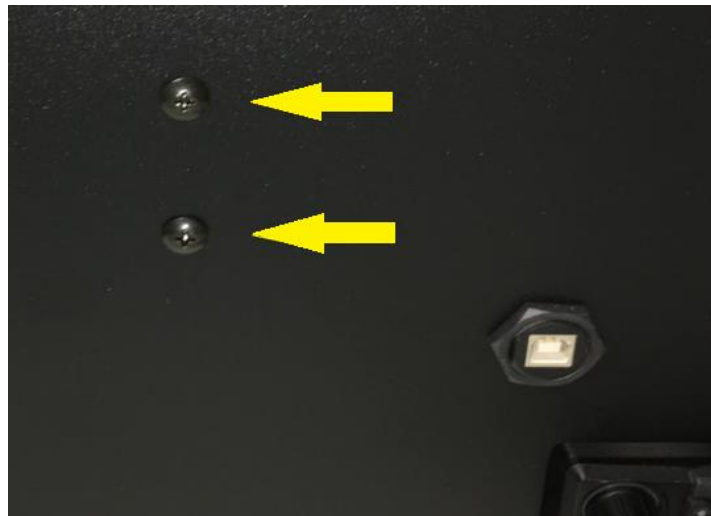


Figure 7 - Location of the microphone clip mounting screws



Figure 8 - Installation of the microphone clip



---

**STEP 4**

Connect the MSU DC power cable and the antenna cable (Figure 9). Install the MSU in the MSU bracket. See figure 10 for the detail of the mounting screws location. Connect the Control Head cable and the DVR cable.

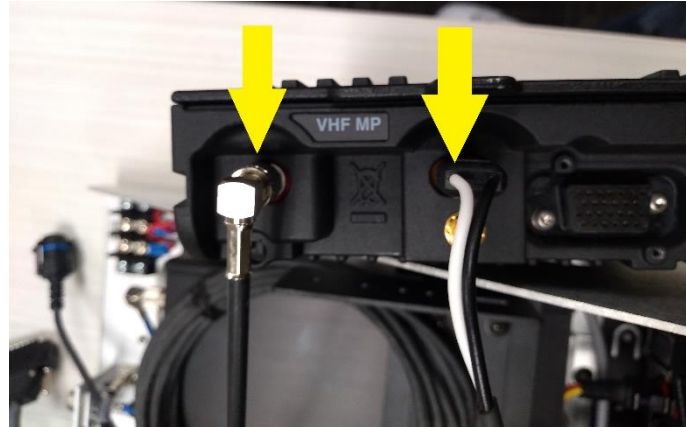


Figure 9 - DC and RF cable connections



Right View

Top View

Left View

Figure 10 - Installation of the MSU – step 1

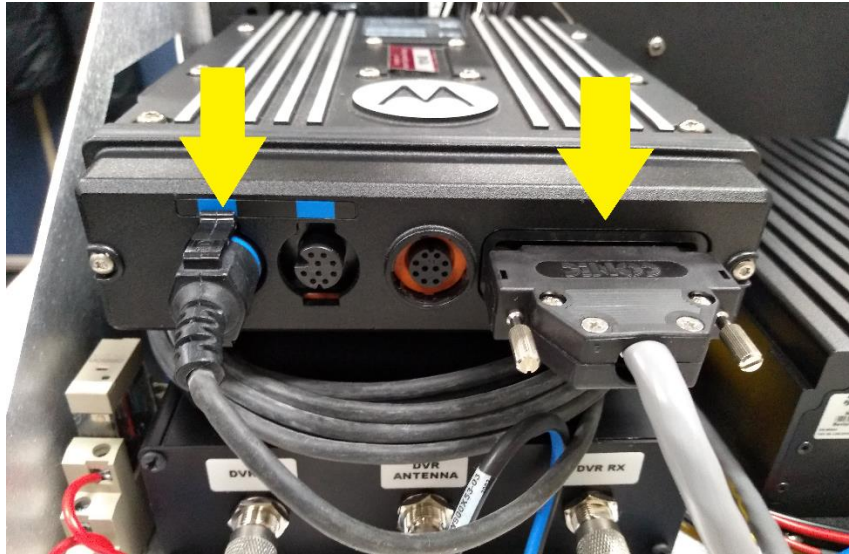


Figure 11 - Installation of the MSU

**STEP 5**

Install the tray in the 19" rack. Connect the DC power supply to the Terminal Strip as per Figure 12. Connect the MSU Antenna cable, and the DVR Antenna cable.

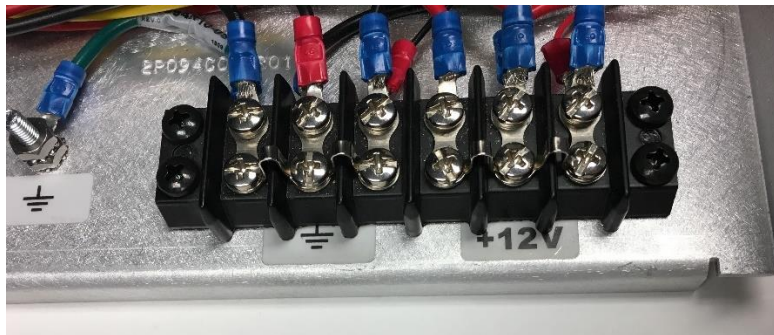


Figure 12 - DC Power connections

Connect the MSU Antenna cable, and the DVR Antenna cable, see Figure 13



Figure 13 - MSU (System) and DVR (Local) Antenna connector location

## **STEP 6**

Program the MSU, DVR-LX and portables for DVRS operation.

- To program the DVR-LX, connect a PC with compatible Futurecom Repeater Configurator (FRC) programming software to the USB port located on the front panel of the Rackmount DVRS.
- Ensure the templates are fully matched by following the guidelines provided in the DVRS Programming Guide 8M083X25R18.
- The **DVR Tx Power shall be set to 32.5 dBm** to provide the correct input signal level to the 50 W Power Amplifier.



**NOTE: DVR Tx Power should not be set to more than 33dBm / 2 Watts. Programming higher power levels may result in the Power Amplifier damage.**

**IMPORTANT!** When programming the DVRS frequencies, ensure they match the DVRS filtering frequencies. To check the tuned frequency setting of the DVRS duplexer, please refer to the DVRS labels located on the tray.

## **STEP 7**

Install the MSU Microphone.



Figure 14 - Front panel fully assembled

**This concludes the installation of the Rackmount DVRS.**



## External Alarm Option Programming Instructions

If the optional external alarm is installed in the Rackmount, it can be programmed with Futurecom Repeater Configurator (FRC) to trigger when specified repeater temperature or power output thresholds are crossed.

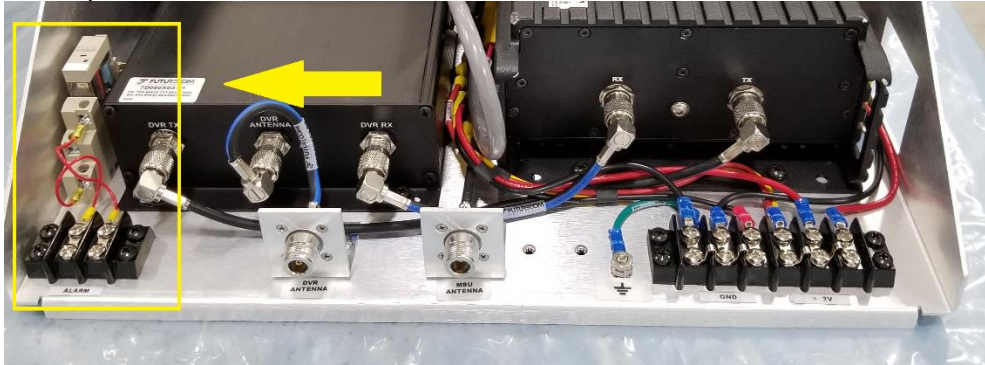


Figure 15 - Optional external alarm hardware location

**Note:** By default, the alarm's circuit is closed, when the alarm is triggered the circuit opens.

### STEP 1

Connect the repeater programming USB cable to the Rackmount and launch Futurecom Repeater Configurator (FRC) Software on a connected PC.

### STEP 2

Load data from APX repeater and navigate to the 'Hardware Setup' window **Error!**  
**Reference source not found..**


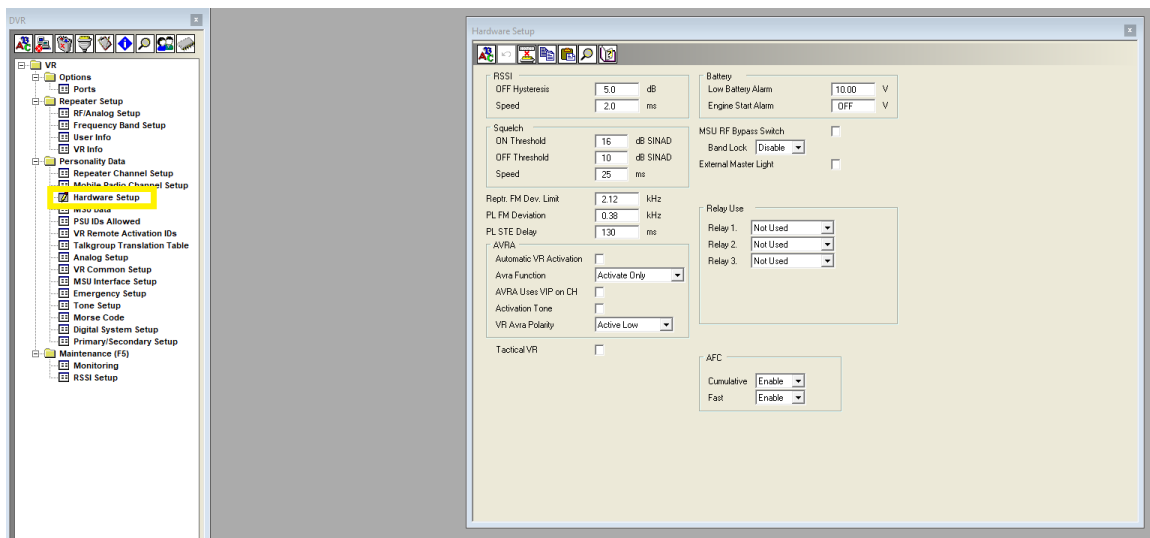


Figure 16 - Hardware Setup window

**STEP 3**


In the 'Relay Use' section, set 'Relay 3' to 'External Alarm'

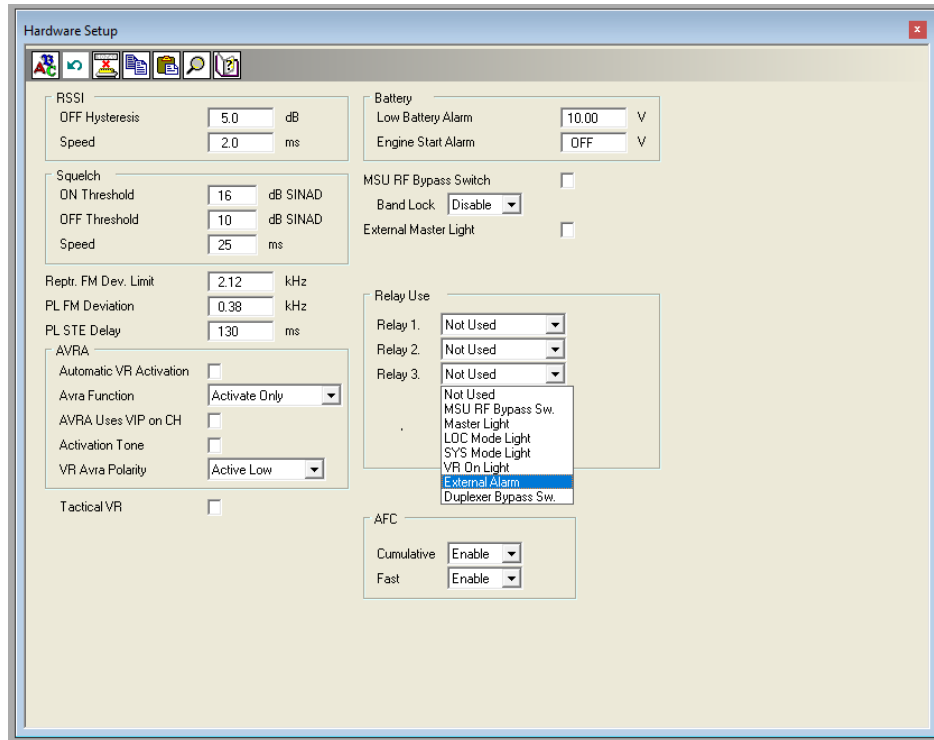

**Figure 17 - Relay Use options**

**STEP 4**

Set 'Temperature Alarm' and 'Output Power Alarm' to desired values.

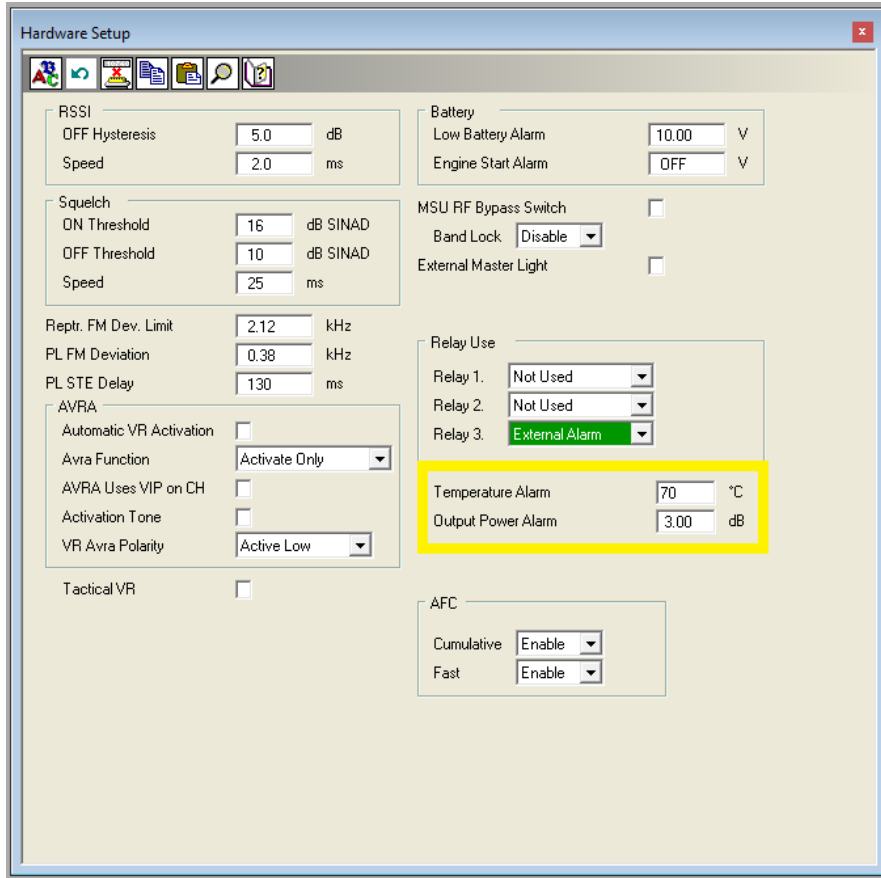

**Figure 18 - Alarm threshold values**

**STEP 5**

Save changes to APX Repeater and allow the repeater to restart.

## Rackmount DVRS Antenna Requirements

Any DVRS Model requires the use of two or three antennas – one or two connected to the Mobile Radio and one connected to the DVR-LX.

**The antennas are not part of the Rackmount package and need to be provided separately.**

### **IMPORTANT!**

**All DVRS models require 30dB minimum Antenna Isolation between the DVR and Mobile Radio Antennas for interference-free operation. A separation of several feet between the antennas may be needed to achieve this.**

**In addition to 30dB isolation, ensure RF exposure separation distance is maintained. Refer to the RF Energy Exposure Compliance, Awareness and Control Information and Operational Instructions section of this document.**

## Appendix 1 – DVR-LX P25 Rackmount Repeater Specifications

General Specifications			
Dimensions: Height / Width / Depth			
Low-Profile	10 1/2" x 19" x 15 3/4"		
High-Profile	17 1/2" x 19" x 15 3/4"		
Approximate Weight			
Low-Profile	26 lbs		
High-Profile	43 lbs		
Channel Spacing	12.5 or 25 kHz programmable		
Number of Channels	192		
CTCSS/DCS	Programmable per Channel		
Power Supply	13.8V DC +/- 20%		
DC Current Drain			
Standby/Receive	1.9A		
Transmit (without Power Amplifier)	14.5 A		
Transmit (with 50W Power Amplifier)	25 A		
Operating Temperature	-30°C to +60°C		
Antenna Impedance	50 Ohms		
Duty Cycle	Continuous (DVR)		
External Connectors			
Antenna (DVR and Mobile)	N Female		
Computer Interface	USB		
Equipment Type Acceptance	VHF	UHF	800
FCC	136-174 MHz L06-DVRSVHF	380-406 MHz 406.1-512 MHz L06-DVRSUHF	806-824 MHz 851-869 MHz L06-DVRS800
Industry Canada	138-174 MHz 2098B-DVRSVHF	406.1-430 MHz 450-470 MHz 2098B-DVRSUHF	806-824 MHz 851-869 MHz 2098B-DVRS800
Transmitter Specification	VHF	UHF	800
Frequency Band [MHz]	136-174	380-430 450-470	851-869
Power Output @ Antenna Port without Power Amplifier with Power Amplifier (Optional)	1 - 10W Programmable 50W		
CCT Option	15 sec to 15 min or Disabled		
Max Spurious Output	-20dBm		
Frequency Stability (-30 °C to +50 °C; +25 °C Ref.)	± 1.5ppm		
FM Hum and Noise 12.5 / 25 kHz	-37 dB / -43 dB		
Audio Response	+1, -3 dB of 6 dB / octave pre-emphasis characteristic over 300 Hz – 3 kHz		
Audio Distortion	<2%		
Receiver Specification	VHF	UHF	800
Frequency Band [MHz]	136-174	380-430 450-470 470-512	806-824
Receiver Sensitivity (simplex/duplex)	-115 dBm		
Frequency Stability (-30 °C to +60 °C; +25 °C Ref.)	± 1.5ppm		
Selectivity 12.5 / 25 kHz	-60 dB / -75 dB		
Intermodulation	-70 dB		
Deviation 12.5 / 25 kHz	± 2.5 kHz / ± 5 kHz		
FM Hum and Noise 12.5 / 25 kHz	-37 dB / -43 dB		

---

Audio Output (Repeater Detect Audio)	600 mV RMS nominal, flat response
Audio Response	+1, -3 dB of 6 dB / octave de-emphasis characteristic over 300 Hz – 3 kHz
Audio Distortion	<2%



Futurecom Systems Group, ULC.  
3277 Langstaff Rd  
Concord, Ontario L4K 5P8  
Canada  
1-800-701-9180

© Futurecom Systems Group, ULC 2020

-----END OF DOCUMENT -----